


Caution: Always wear safety glasses and gloves. Disconnect all power to the downrigger before beginning any work or maintenance. Johnson Outdoors Inc. is not responsible for any damage due to improper rigging or installation. If you do not have the skills, experience and tools to perform the following maintenance and repairs, we recommend you seek the help of a Cannon Authorized Service Center. A list of Authorized Service Centers can be found at <http://www.cannondownriggers.com/ASC/> or contact our Technical Service Department by email at service@cannondownriggers.com or, by dialing 800-227-6433.

The following instructions show how to replace the cable on a Cannon Downrigger.

Step 1) Begin removing the old cable from the spool, towards the end you will notice that the cable is inserted into a small hole in the spool and held in place by a crimped sleeve. This crimped sleeve can be cut off to fully remove the wire from the spool.

Step 2) The end of the new cable is inserted into the small hole on the spool and pulled through the other side, a sleeve can then be crimped on to secure the cable to the spool.

If you have an electric downrigger you will need to push the up switch to wrap the cable on the spool. If you have a manual downrigger you will need to crank the handle forward to wrap the cable on the spool.

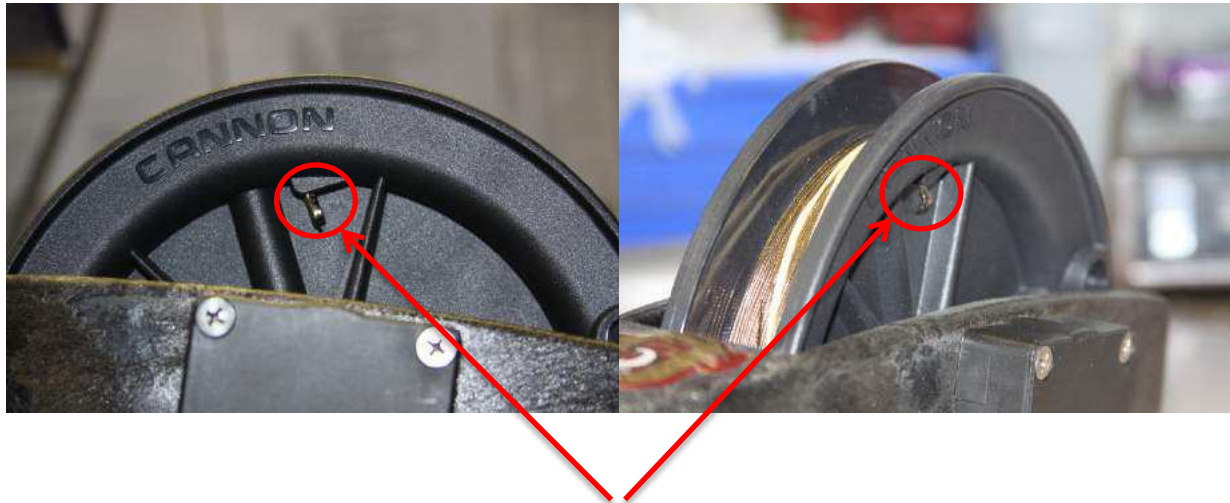

The pictures above show the hole location on the spool and where the sleeve will be crimped onto the cable.