



Malibu Two XL Frame Seat Kit Instructions



SAFETY CONSIDERATIONS



WARNING

Always have a personal flotation device and paddle with you when taking out a powered/pedal/paddle watercraft. Be especially careful when navigating in moving water, near dams, waterfalls, and/or hazardous water conditions.



WARNING

You are responsible for the safe and prudent operation of your watercraft. We have designed your Old Town product to be an accurate and reliable tool that will enhance watercraft operation and improve your ability to catch fish. This product does not relieve you from the responsibility for safe operation of your watercraft. You must avoid hazards to navigation and always maintain a permanent watch so you can respond to situations as they develop. You must always be prepared to regain manual control of your watercraft. Learn to operate your Old Town product in an area free from hazards and obstacles.


NOTICE: The images in this document may not look the same as your product but your unit will function in a similar way.

CONTENTS

⚠ CAUTION

Before getting started, please read all instructions thoroughly to prevent injury.

ALWAYS WEAR SAFETY GLASSES WHEN HANDLING TOOLS AND EQUIPMENT.

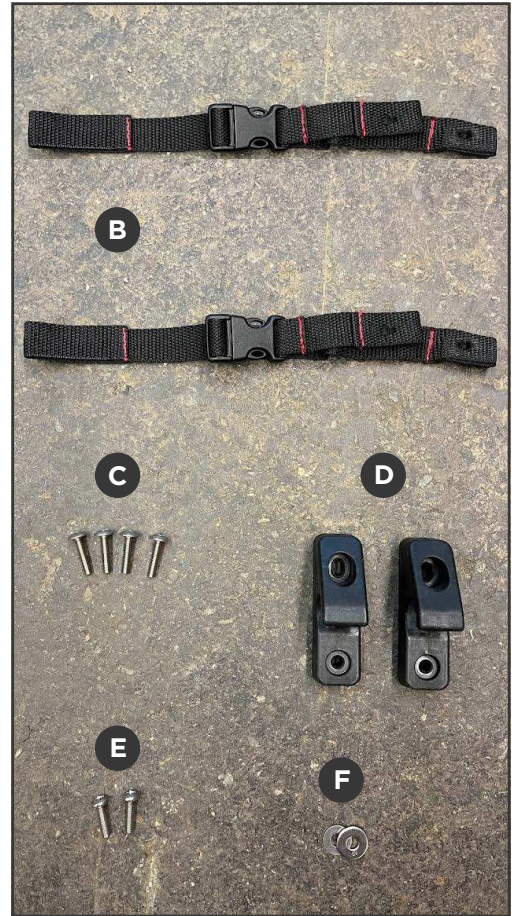

PARTS

A. Malibu Two XL Frame Seat	Part # 01.1315.3616	Qty 1
B. Seat Retention Strap	Part # 01.1316.0743	Qty 2
C. Phillips Head Truss Screw	Part # 01.1315.0701	Qty 4
D. Seat Clip	Part # 01.1332.0002	Qty 2
E. 10-32 Phillips Pan Head Screw	Part # 07.2715.0000	Qty 2
F. Washer	Part # 01.1315.3000	Qty 2
G. 2L Dry Bag	Part # 01.1316.0224	Qty 1

TOOLS REQUIRED

- Safety Glasses
- #2 Phillips Head Screwdriver or Drill

INSTRUCTIONS

1

PREPARING FOR SEAT KIT INSTALLATION

To begin, place the hull of the watercraft on a stable work surface at a comfortable working height. Adjust the back rest to the loosest position so that it lays flat.



2


You can also remove the seat back by carefully removing the two screws that connect the back rest to its cradle and the two screws and washers that connect the back rest adjusting straps to the watercraft.

NOTICE: Be sure to save all hardware removed. These can be reinstalled if the frame seat kit is removed.



3

Locate the four black Phillips head plastic screws in the rectangular recesses in front of the seat pad and carefully remove using a Phillips head screwdriver or drill and set aside. Locate the two black Phillips head plastic screws on the vertical surface behind the seat back and carefully remove using a Phillips head screwdriver or drill and set aside.

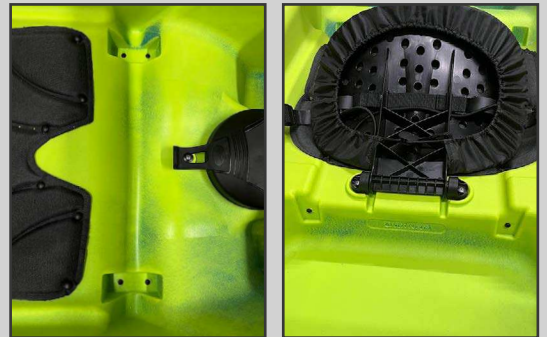

4

INSTALLING THE SEAT KIT

Using a Phillips head screwdriver or drill, attach the two frame seat clips provided in the rectangular recesses in front of the seat pad with the four longer Phillips head truss screws. The opening in the clips should face the bow (front) end of the watercraft.

