


CANOE STORAGE PRACTICES:

- Discovery Solo 119
- Canoe length: 11'9"
- Support arm distance (from bow/stern end): 42"

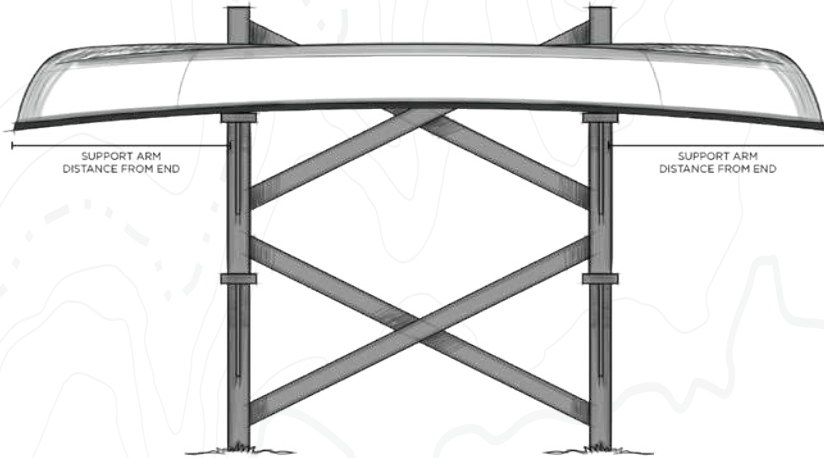

⚠ WARNING: Operating, servicing and maintaining a recreational marine vessel can expose you to chemicals including engine exhaust, carbon monoxide, phthalates, and lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. To minimize exposure, avoid breathing exhaust, service your vessel in a well-ventilated area and wear gloves or wash your hands frequently when servicing this vessel. For more information go to www.P65warnings.ca.gov/marine.

For more information on the above or links to owners groups for Old Town Sportsman watercraft, visit OLDTOWNCANOE.COM/SPORTSMAN

Old Town SPORTSMAN


Getting Started With Your Paddle Old Town Sportsman Watercraft

DISCOVERY
SOLO 119

106

120

BIGWATER
132

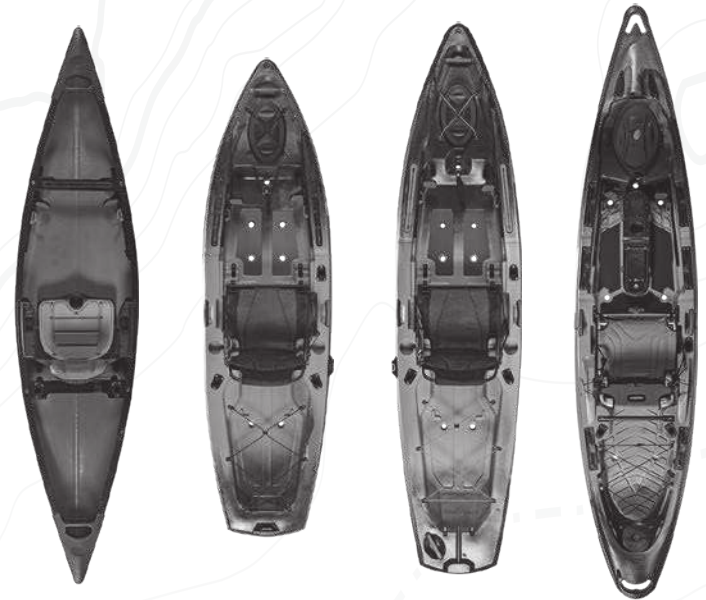

For more information on features, specifications, processes, maintenance, and troubleshooting tips, visit

OLDTOWNCANOE.COM/SPORTSMAN

⚠ PEDAL WATERCRAFT SAFETY:

Always have a personal flotation device and paddle with you when taking out a pedal watercraft.

Be especially careful when navigating in moving water, near dams, waterfalls, and/or hazardous water conditions.



TOOLS NEEDED:



- Phillips Head Screw Driver
- Small Adjustable Wrench

UNPACKAGE:

- Thoroughly inspect your hull for any damage that may have been incurred during shipping or handling.


SEAT INSTALL:

- The Old Town Sportsman paddle seat, if equipped, is adjustable for high and low seat positions. The front of the seat is anchored to the boat using two black seat clips, while the back of the seat rests on the top of the hull and is secured by one or two straps. No tools are needed to install the seat.
- Discovery Solo 119 and BigWater 132 seats come pre-installed.
- To install the seat in the 106 and 120, insert the front tube into the black seat clips (high or low depending on preference). Rotate the seat down so that the rear pivot points rest on the landing pads. (fig 1).
- Use strap(s) behind the seat to secure the stern tube to the boat (fig 2). These straps are designed to keep the seat with the boat and do not need to be overtightened.
- The seat's backrest straps can be used to adjust the seatback to recline. For transport, tighten the backrest straps all the way down so the seat is secured.
- The BigWater 132 seat also is adjustable for high and low seat positions using the front bracket to secure the seat in the desired position.

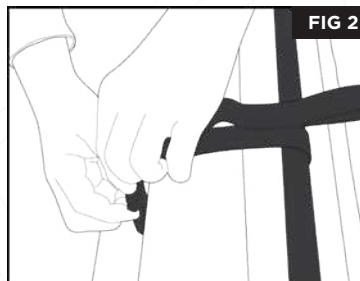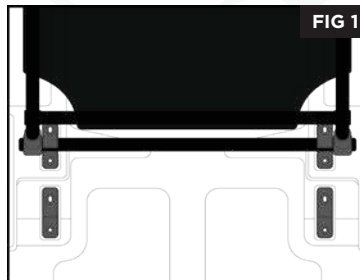

ACCESSORIES INSTALL:

- **Install Paddle Clip:** Locate the clip and rubber strap in the tackle box and assemble (fig 3).
- Locate inserts on the starboard side of the boat. Line up holes and slots on paddle clip strap with features on backside of paddle clip. Attach clip/strap with the two supplied 10-32 x 1/2" Phillips head screws. Orient with strap below the clip for easy access (however, it can be mounted in either orientation).

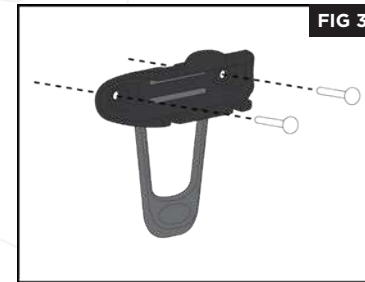

SAFETY GUIDELINES:

- ⚠ Caution should be used when operating the watercraft while standing and while near dams, waterfalls, and/or moving water conditions.
- ⚠ The Old Town Sportsman paddle watercraft is not designed or intended for fast moving currents or large swells. Please do not operate in water currents that move faster than you are able to paddle in the kayak.
- Always wear a UL certified PFD when using your Old Town Sportsman watercraft.

BEST PRACTICES TO EXTEND THE LIFE OF YOUR WATERCRAFT:

- **Inspect the kayak before each trip.** Check to make sure all accessories are attached and secure.
- Storing your watercraft in a cool area out of direct sunlight is recommended, especially in warmer climates. For more information on best storage practices for your watercraft visit www.oldtowncanoe.com/frequently-asked-questions